

ISO Direct Mount/ Fine Polishing
SIZE: F03 to F12/ 9*9 to 22*22 Stem

SPECIFICATION

- * CF8 (SS304) or CF8M (Ss316) bonnet
- * Investment casting bonnet
- * Leakage test port
- * ISO 5211 direct mounting pad on both sides
- * Two sets of spring washer
- * Two sets of V-ring packing
- * Fine grind on stem part
- * With O-ring design

OPTION

- * Special alloy is available




ZIPSON'S fugitive emission bonnet was designed for keeping from fugitive emission leakage from the stem part of valve. The test port design allow the sniffer to detect any fine emission from the bonnet. This will protect people and environment.

The bonnet with ISO direct mounting pad on both sides, this easy-assembling design will save your working time. With 2 sets of SS 301 spring washer, V-ring packing, thrust washer, O-ring will offer the big help on sealing.

The valve connected side of fugitive emission bonnet is with a gasket (seal) to seal. Just make sure the ISO pad of valve is flat & finishing.

The bonnet can be the normal extended stem. This will be simple in your stocking principle for stocking on bonnet for 2 usages.

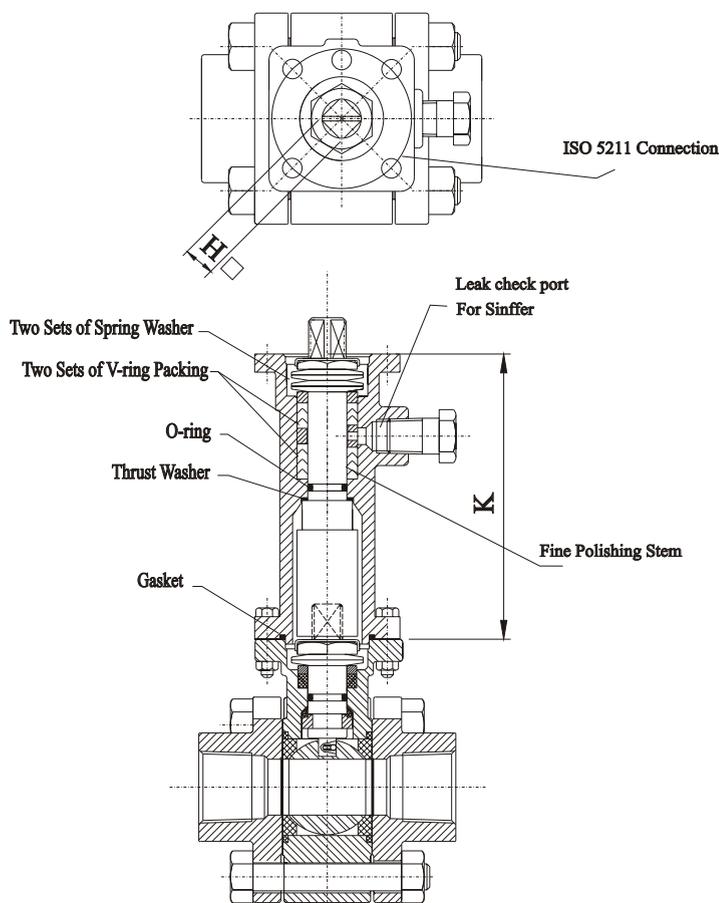

Fugitive Emission & Normal Extended Bonnet

ITEM	ISO 5211	H	K
F34	F03/ F04	9	4" (101.6)
F45	F04/ F05	11	4" (101.6)
F57	F05/ F07	14	6" (152.4)
F71	F07/ F10	17	6" (152.4)
F101	F10/ F12	22	6" (152.4)

* Zipson use the same casting bonnet for both fugitive emission & normal one.